


Kartano PR-A/Y Seinä/Vägg/Wall

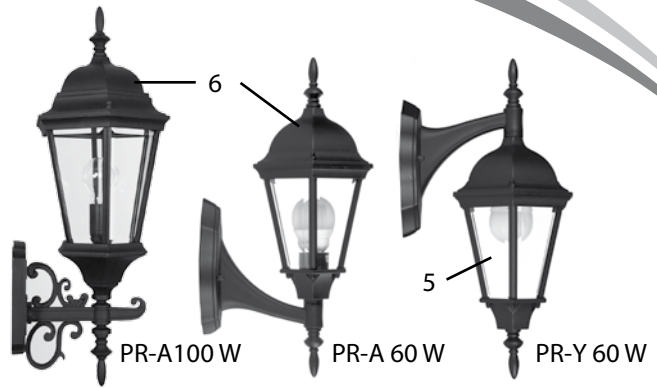

Asennusohje

Valaisimen saa asentaa vain riittävän ammattitaidon omaava henkilö. Käytä ainoastaan valonlähdettä ja tehoa joka valaisimeen on merkitty. Kytke virta pois päältä ennen asennusta tai huoltoa. Tämä asennusohje on säilytettävä ja sen on oltava käytössä asennuksessa ja huollossa.

Monteringsanvisning

Armaturen får endast installeras av en fackman. Använd endast ljuskälla och effekt som är märkta på armaturen. Gör kretsen strömlös före installation eller service. Denna monteringsanvisning bör sparas och finnas tillgänglig vid installation eller framtida service.

Mounting instruction

Only a professional electrician is allowed to do the installation. Use only light sources and rated wattages as marked in the luminaire. Switch off the current before installation or service. This mounting instruction must be kept available during installation and for future maintenance.


- Avaa koristemutterit (1).
- Kiinnitä asennus/kytkentäkotelo (2) seinään.
- Vie syöttöjohto kumitiivistein (3) läpi ja liitä kytkentäjohdot liitinrimalla (4) värikoodin mukaan. Muista maadoitus.
- Kiinnitä valaisin koteloon ja kiristä koristemutterit.
- Asenna oikean tyyppinen maks. 60/100 W / E27 valonlähde.
- Asenna kupu (5) PR-Y / hattu (6) PR-A.

- Lösgör mutrarna (1).
- Fäst monterings/kopplingsdosan (2) på vägg genom fästhål.
- För inkommande kabel genom gummitätningen (3) och installera kabeln till kopplingsplinten (4), enligt gällande föreskrifter.
- Fäst armatur på monteringsdosa och läs mutrarna.
- Installera lampan max. 60/100 W / E27.
- Installera kupan (5) PR-Y / takdelen (6) PR-A.

- Open the cap nuts (1).
- Install the mounting/terminal box (2) to wall trough the fixing holes.
- Take the supply wiring through rubber seal (3) and connect it properly to the terminal block (4).
- Fasten the fixture on the mounting box with cap nuts.
- Insert the lamp max. 60/100 W / E27.
- Install the glassframe (5) PR-Y / hat (6) PR-A.

PR-A/Y 60 W

PR-A 100 W

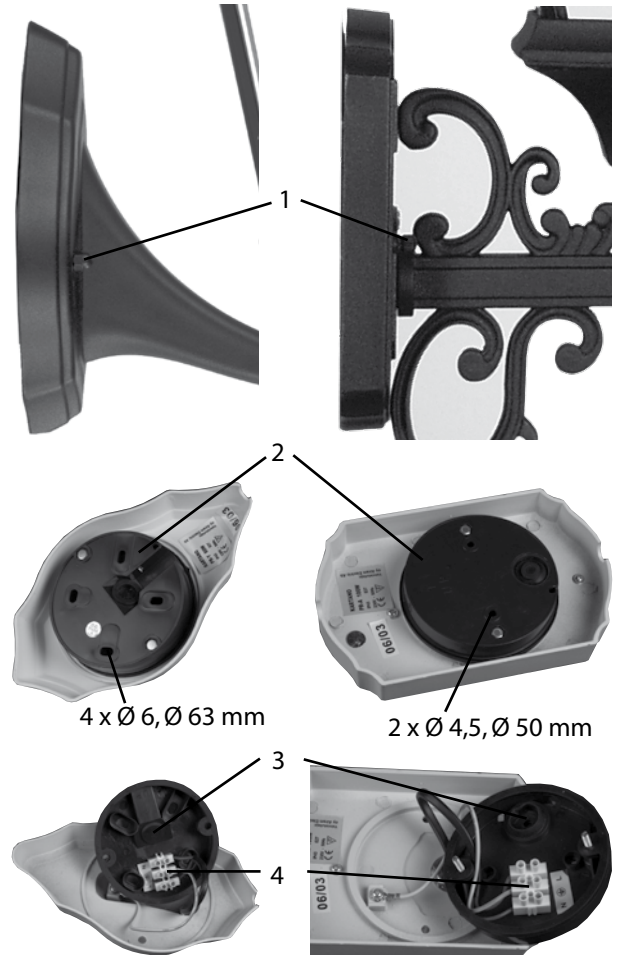


4 x Ø 6, Ø 63 mm

2 x Ø 4,5, Ø 50 mm

Lisätietoja / Tilläsuppgifter / Additional information

- 230 V 50 Hz
- IP 23
- -o 3 x 2,5 mm²



Valmistuttaja / Tillverkat för / Made for:

Oy Airam Electric Ab
PL 39 (Lampputie 12)
FIN-00751 Helsinki
www.airam.fi

Tuote/Product	EAN	Airam nr	W	Kanta/Lamp hållare/Lamp holder	Kg
PR-A60 Va/Vi/Wh	6435200009791	4107000	60	E27	1,95
PR-A 60 Mu/Sv/Bk	6435200009807	4107003	60	E27	1,95
PR-A 100 Va/Vi/Wh	6435200009814	4107006	100	E27	3,25
PR-A 100 Mu/Sv/Bk	6435200009784	4107009	100	E27	3,25
PR-Y 60 Va/Vi/Wh	6435200009821	4107078	60	E27	1,95
PR-Y 60 Mu/Sv/Bk	6435200009838	4107081	60	E27	1,95