

Kartano SK 100 Seinä Vägg/Wall

Asennusohje


Valaisimen saa asentaa vain riittävän ammattitaidon omaava henkilö. Käytä ainoastaan valonlähdettä ja tehoa joka valaisimeen on merkitty. Kytke virta pois päältä ennen asennusta tai huoltoa. Tämä asennusohje on säilytettävä ja sen on oltava käytössä asennuksessa ja huollossa.

Monteringsanvisning

Armaturen får endast installeras av en fackman. Använd endast ljuskälla och effekt som är märkta på armaturen. Gör kretsen strömlös före installation eller service. Denna monteringsanvisning bör sparas och finnas tillgänglig vid installation eller framtida service.

Mounting instruction


Only a professional electrician is allowed to do the installation. Use only light sources and rated wattages as marked in the luminaire. Switch off the current before installation or service. This mounting instruction must be kept available during installation and for future maintenance.

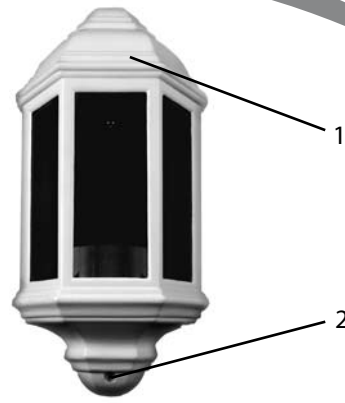


- Irroita valaisimen suojakupu (1), joka on yhdellä ruuvilla (2) kiinni valaisimen pohjassa.
- Ota irti lampun pitimen alla oleva, kytkentätilan muovinen suojakupu (3) painamalla peukalolla alaosasta ja nostamalla ylös.
- Pujota johtimet suojakumin (4) lävitse ja kiinnitä runko seinään nurkistaan neljällä ruuvilla. Asenna väliholkit (6) ruuvien kanssa rungon ja seinän väliin.
- Kytke johdot kytkentärimaan (5). HUOM! muista maadoitus.
- Asenna lamppu Maks. 100 W/E27.
- Valaisin kootaan päinvastaisessa järjestyksessä.



- Lösgör kupan (1) från stommen med skruvan (2).
- Lösgör Kopplingsdosans (3) skydd.
- För inkommande kabel genom gummitätningen (4) och fäst stommen på vägg med fyra hörnskruvarna. Distanshylsan (6) träs på före fastsättning på vägg.
- Koppla anslutningskabeln till kopplingsplinten (5), enligt gällande föreskrifter.
- Installera lampan max. 100 W/E27.
- Montera armaturen i motsatt ordning.

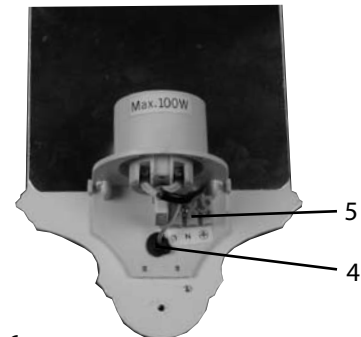


- Take of the cover (1) by loosening the screw (2).
- Loose the terminal box (3) cover by pushing it with finger from the bottom, and lift it of.
- Take the supply wiring through the rubber seal (4) and fasten the fixture on the wall with 4 screws on the corners. Install the bushings (6) with the screws between the fixture and wall.
- Install the supply wiring properly to the terminal block (5).
- Install the lamp max. 100 W/E27.
- Assembly the lantern in opposite order.

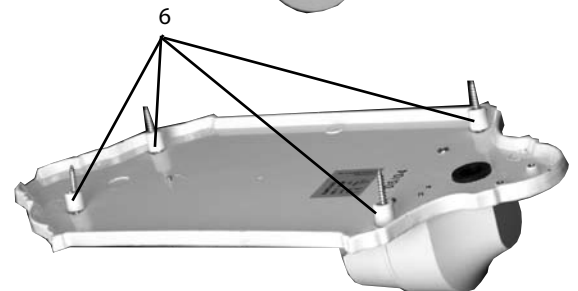

Lisätietoja / Tilläsuppgifter / Additional information

- 230 V 50 Hz
- IP 54
- -o 3 x 1,5 mm²



Valmistuttaja / Tillverkat för / Made for:

Oy Airam Electric Ab
PL 39 (Lampputie 12)
FIN-00751 Helsinki
www.airam.fi

| Tuote/Product | EAN | Airam nr | W | Kanta/Lamp hållare/Lamp holder | Kg |
|-----------------------|---------------|----------|-----|--------------------------------|------|
| SK100 valk/vitt/White | 6435200128003 | 4107074 | 100 | E27 | 1,45 |
| SK100 Musta/sv/Bk | 6435200127990 | 4107073 | 100 | E27 | 1,45 |